


#### **GENERAL MEASURING GUIDELINES FOR ALL POOL SHAPES**

- Measuring a pool will be easier if you have another person helping you.
- Draining the pool will also make the process of measuring your pool easier; however, it is not always necessary, as many pools can be measured with water in them.
- **Never assume a pool is standard.** All pools are different. Most importantly, measure the pool for an exact fit. Actual pool measurements should be made even if original pool plans are available, due to the fact that slight variances may have occurred during construction.
- When measuring pools, do not make allowances for weather conditions, temperature, or the fact that vinyl shrinks and expands. These calculations are made when the new liner is designed.
- Supply all measurements in feet and inches, rounding up to the **nearest quarter-inch on liner-covered features**, such as steps, ledges, and benches, and rounding up to the **nearest half-inch** on all other measurements.
- Follow the "step-by-step" measuring instructions carefully, referring to all diagrams to ensure accurate measurements.
- Remember to include your name, mailing address, phone and fax numbers, and email address on each page that you send to Branded Manufacturing. You must also sign off on an approval drawing of the liner before we can begin building the liner.
- Remember to record all of your measurements and place them in the proper lines/boxes on the proper form(s). You may need to transfer measurements you have made on the "MEASURING INSTRUCTIONS" pages onto the actual measuring form.
- Write your measurements legibly, using BLACK INK. (NO PENCIL OR FELT-TIP MARKER, PLEASE!) Make copies of all pages for your records before sending them to us. You will need to refer to your copies if we have questions regarding your measurements.
- When in doubt, give us a call at (731) 345-4500.

## **ONLY THE BEST GET BRANDED**


# MEASURING INSTRUCTIONS - STEP-BY-STEP GRECIAN POOLS

#### STEP #1: MEASURE THE WIDTH (A) AND THE LENGTH (B)

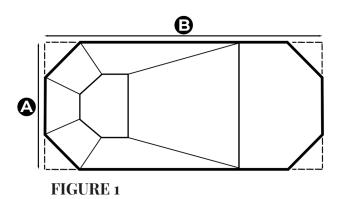


Referring to the illustration of your Grecian pool (Figure 1), be sure that the width (A) and the length (B) measurements are made at the bead receiver (where the liner snaps into the track), not at the edge of the coping (the edge of the pool deck). See Figure 2.

# RECORD MEASUREMENTS ON THE MEASURING FORM.

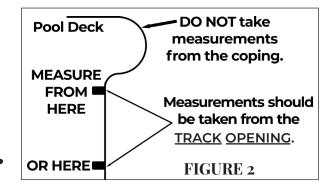


#### STEP #2: MEASURE THE CORNER DIAGONALS

For a Grecian pool, you will need to measure the diagonals (#1, #2, #3, and #4). Refer to Figure 3 to locate the diagonals. Remember to use the bead receiver (pool edge) as the reference point. The diagonals are often overlooked, but they are important, as few pools are perfectly square. There can be a substantial difference end-to-end in a pool, and that needs to be noted if a liner is to fit properly. (The Computer-Aid-ed-Design system that engineers your liner can adjust for out of square pools.)

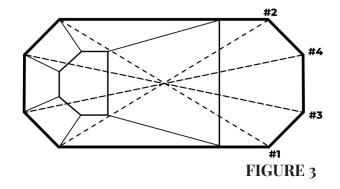

#### STEP #3: MEASURE THE PERIMETER EDGES

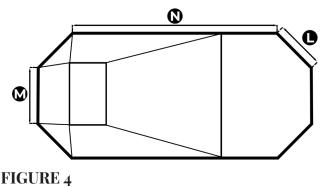

Grecian pools require additional dimensions around the perimeter of the pool. These include the end panel (M), the straight wall (N), and the corner panel(s) (L). Verify that each corner panel measurement around the pool aree equal. If they are not, please indicate that information in a drawing or on the MEASURING FORM. Refer to Figure 4.

RECORD MEASUREMENTS ON THE MEASURING FORM.


## STEP #4: MEASURE THE DIMENSIONS (HORIZONTALLY AND VERTICALLY)

Choose the bottom contour of your pool from the illustration shown in Figure 5 to determine which measurements you will need to take.

### HOW DO I MEASURE THE BOTTOM OF THE POOL?

You will be able to make horizontal measurements of the pool bottom without entering the pool. Taking these measurements is easier than you may think when you use this easy-to-make measuring tool.

You will need:

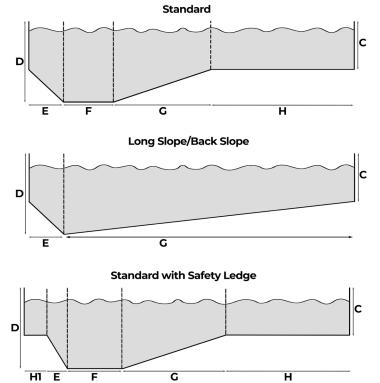

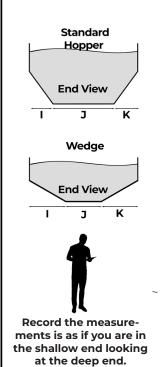


FIGURE 5

- 1) A long, straight pole (telepole, pool pole, or equivalent)
- 2) String attached to the end of the pole
- 3) Some sort of weight tied to the other end of the string, such as a plumb bob
- 4) A measuring tape

Follow the instructions below, using your "fishing pole", to make these measurements.

#### **Horizontal Bottom Measurements**

Use your "fishing pole" to "fish" for a point on the bottom of the pool. With the pole parallel to the ends of the pool and the string vertical (allow no slack in the string), measure the distance from the edge of the pool (water's edge) to the desired measurements based on the bottom contour of your pool. For example, to take measurement I or K, you would stand on one side of the pool, and "fish" for a corner of the hopper. You would then measure the distance from the edge of the pool (pool wall) to the end of the pole where the string is attached.

#### **Depth Measurements**


When taking the depth measurements (C and D), be sure to measure from the bottom of the pool floor to the bead receiver. Do not measure to the top of the pool; otherwise, your measurement will be incorrect.

Be sure you are NOT measuring a slope when taking horizontal bottom measurements. We only use measurements parallel to the deck.

RECORD MEASUREMENTS ON THE MEASURING FORM.

DOUBLE CHECK YOUR MATH TO ENSURE THE LENGTHS EQUAL MEASURE-MENT **B** AND THE END VIEW MEASUREMENTS EQUAL **A**. IF THEY DO NOT, THE POOL AND/OR THE LINER WILL BE OUT OF SQUARE.

#### STEP #5: INDICATE HOPPER TYPE

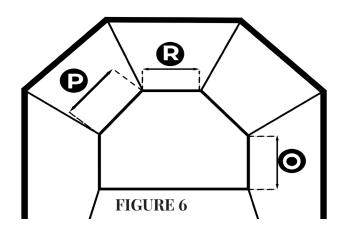


If your pool has a Grecian-contoured hopper (Figure 6), specify and include the measurements found in Figure 6 on the MEASURING FORM.

If your pool has a standard, squared hopper, you will only need to include measurements for letters **F** and **J**.

#### STEP #6: INDICATE WALL SEAM PLACEMENT

By default, the wall seam placement is in the center of the shallow end. However, if the pool has steps in a different location, the wall seam can be placed in the center of the step. Indicate on the MEASURING FORM where the seam should be located if other than the center shallow end. Refer to Figure 7.

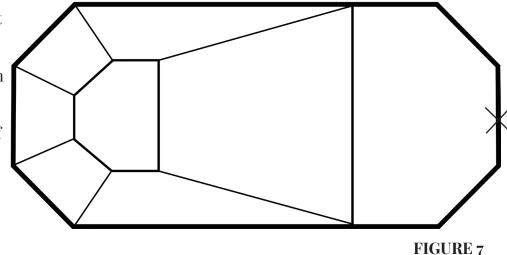

# STEP #7: MEASURE ANY FEATURES THAT WILL BE COVERED IN VINYL, INCLUDING STEPS, BENCHES, AND LEDGES.

If your pool has built-in steps, benches, or ledges that are covered with vinyl, you must complete the separate MEASURING FORM for Vinyl Covered Features.



### **MEASURING FORM - STANDARD GRECIAN**

COMPANY/NAME:		
ADDRESS:		
CITY:	STATE:	ZIP:
		E (Work):
FAX: EMAIL	• • •	
LINER DESCRIPTION:		
PATTERN:	MIL:_	BEAD TYPE:
DIMENSIONS (see page 2-	<del>-4)</del>	INDICATE WALL SEAM LOCATION
A (Width):	Hopper	AND/OR LOCATION OF STEPS
B (Length):	☐ Contoured	
B (Length): Diagonal #1:	☐ Squared	<b>© B</b>
Diagonal #2:		
Diagonal #3:		
Diagonal #4:		
C (Wall Height):		
D (Depth):	_	
E (Back Slope):		
F (Hopper Length):	·	
G (Long Slope):		COMMENTS
H (Shallow End):		
I (Left Side Slope*):	_	
J (Hopper Width):		
K (Right Side Slop <mark>e*):</mark>		
L (Corner Panel):		
M (End Panel):	_	
N (Straight Wall):		POOL LOCATION ADDRESS (REQUIRED)
O (Hopper Contour Length):		
P (Hopper Corner Length):		
R (Hopper End Length):		P.O. #:
H1 (Safety Ledge):		
*Standing in Shallow End		Signature: ————————————————————————————————————
☐ VINYL-COVERED STEPS?		Your signature indicates that you have verified your
Please attach additional measuring for	rms.	measurements and that the information you have pro-



MEASURING FORM - EXTERN	IAL IN-GROUND VINYL STEPS
COMPANY/NAME:	
ADDRESS:	
CITY: STAT	TE: ZIP:
PHONE (Cell): PI	HONE (Work):
FAX: EMAIL:	
BACK CORNERS (follow procedures from Step 4)  Square (90°) Cut (Diagonal) Size: Radius (Rounded) Size:	POOL LOCATION ADDRESS (REQUIRED)
B RECESS CORNERS  Square (90°) Cut (Diagonal) Size: Radius (Rounded) Size:	
STEP LOCATION  If a gap exists between the bench/ledge and the remainder of the wall, indicate those measurements below.  X:ft in Y:ft in  DEPTH AND WIDTH  Measure the total width and depth of the	CIRCLE STAIRS LOCATION(S)
stairs. Include the depth of the recess.	X - left of stairs (standing in shallow end)
Width: ft in Depth: ft in  RISERS AND TREADS  Measure riser heights and tread depths.  R1: T1: T2: T3: T3: T4: T4: T4: T5: T4: T5: T5: T5: T6: T6: T6: T7:	Y - right of stairs (standing in shallow end)  Riser  Riser
Do you need rod pockets to secure steps?	TDEADS


**☐ Yes** 

 $\square$ No



MEASURING FORM - INTERNAL IN-GROUND VINYL STEPS			
COMPANY/NAME:			
ADDRESS:			
CITY:	STATE:	ZIP:	
PHONE (Cell):	PHONE (Work):		
FAX: EMAIL:			
A STEP STYLE PLEASE  □ Full Width PROVIDE  □ Corner DETAILED  MEASUREME  □ Step/Bench Combo  □ Specialty/Custom/Other		Corner	
Indicate where the stairs are local	ted.		
RISERS AND TREADS  Measure riser heights and tread dept  R1:  R2:  R2:  R2:		Step/Ledge Combo	
R4:T3: R5:T4:			
Please add additional information comments below.	or	ar 1	

POOL LOCATION ADDRESS (REQUIRED)

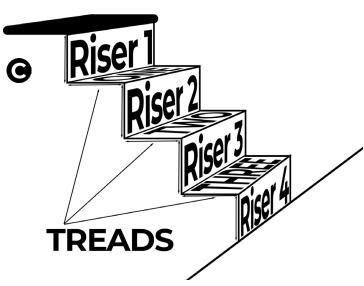

### MEASURING FORM - VINYL-COVERED BENCHES/LEDGES

MEASURING FORM - VINTL-	COVERED BENCHES/LEDGES
COMPANY/NAME:	
ADDRESS:	
CITY: STAT	TE: ZIP:
PHONE (Cell): PI	HONE (Work):
FAX: EMAIL:	
A If a gap exists between the bench/ledge and the remainder of the wall, indicate thise measurements below.  X:ftin _ Y:ftin  B RISERS AND TREADS  Measure riser heights and tread depths.  R1:T1:	B Diser 1
POOL LOCATION ADDRESS (REQUIRED)	7

### **ONLY THE BEST GET BRANDED**